

MAiNNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

MG-950d Sport GPS data logger



MG-950d
Sports BT GPS Datalogger
MAiNNAV

MAiNNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

Table of content

A. Quick Use	2-4
B. Introduction	5
C. Feature	5
D. Specification	5
Physical Dimension.....	5
Environmental Characteristics.....	6
GPS.....	6
LED Status	6
Bluetooth	6
Position accuracy	6
Interfaces.....	7
Connector.....	7
Battery.....	7
Accessory	7
Certification:	7
Warranty	7
E. Operational characteristics	7
F. Safety Statement	8
G Earth Datums & output setting	9-11
H . Bike mounting installs	12

MAINNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

A. Quick use

1. Standard package

GPS Unit + Car charger + travel charger + Li-ion Rechargeable Battery + Document CD + Warranty Card

2. 10 hours full charge is required before using (recommendation)

Fully charge the battery for at least 10 hours before using can last for 8 hours continuously operation facilitating the low power consumption design at 66 mA .

3. Turn on the Bluetooth function in your PDA or PC

Start up **MG-950d** receiver for pairing before set off Bluetooth function in PDA or PC.

Moreover, check the device is equipped with Bluetooth function.

If not, you may need to acquire an optional CF or SD Bluetooth card.

4. Found a shortcut automatically in Bluetooth Manager window

The system will automatically set up quick connect device, Mainnav in Bluetooth Manager.

Further step, click the device to connect Bluetooth receiver.

5. Check the Serial Port in Bluetooth Setting and Set up correct Serial Port in your map software

Click Serial Port to confirm the COM port after pairing with the receiver. Using PDA / PC to pair the receiver. Start your map function and choose the right serial port and select "Outbound COM port ". The pass word for paring is "0000".

6. Switch off the Bluetooth function

Switch off the Bluetooth function before you turn off your PDA/PC, and Switch off receiver disconnect the GPS function.

7. GPS data logger

Turn on the **MG-950d** and press Power button then enter data logger recorded system, start to record your journey. Stop the data logger function, press "Power" button, it will turn off.


Check the GPS data—Using USB cable connect **MG-950d** to your PC (please install Mainnav software application), then you could view recorded data on Google Maps. For detail instruction , **please check CD file (software instruction)**

MAINNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

8. LCD display

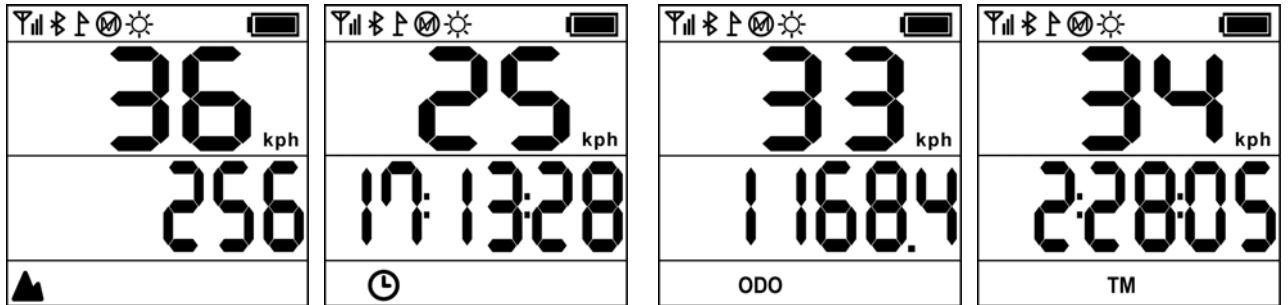


Speed/Elevation

Speed/time

Speed/total mileage

Speed/moved time

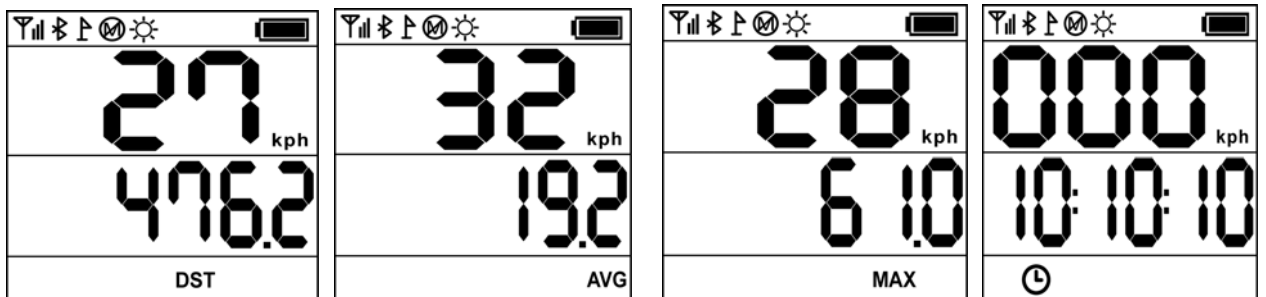

Speed/moved distance

Speed/average Speed

Speed/ Maximum speed

Data turns Zero
(time except)



GPS signal

Bluetooth on

Data logger on

Memory full

backlight on

Power

9. Button intro








MAINNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

10. Function switch

Operation	display	Definition
Press Power button 3 seconds		Stay on - GPS and Bluetooth is on
When Power on , press power button 2 seconds		Data logger is on
Press back-lighted button 3 seconds		Back-lighted is on
Press back-lighted button 5 seconds		Data turns Zero
Press back-lighted button 12 seconds		Total mileage turns Zero(ODO)
Power on—press two buttons together		switch to metric and imperial(mph)/(kph)
Power off , press two buttons together		Adjust time Zone
Touch pad 		Touch --Move to next page and show different data
Press this button 3 seconds 		It will move to next page automatically

When unit is on, press power and back-lighted button together (3 sec) ----you could switch to metric and imperial.

When unit is off, press two buttons together (3 seconds) ---- you could set the right time zone.

Press Back-lighted button 5 seconds ----data back to zero.

Touch pad --- move to next page

Press touch pad 3 seconds—it will move to next page automatically

MAINNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

B. Introduction

MG-950d is marvelous Sport GPS with data logger. The chip designed based on SiRF Star III LP which provides the high sensitivity for personal navigation and the wireless Bluetooth transmission in the world.

This new gadget with LCD monitor is ideal for biking, driving and long journey. User could easy to view the screen while workout such as total mileage/kilometer, moved time, elevation and speed. This new device is compact and easy to carry.

MG-950d is a small, robust unit that records NMEA position data from a GPS. It is really convenient, economical alternative to using a laptop computer especially on long road. Simply connect the logger to a GPS during your trip then download the track data to a PC. Also, our photo map part is one of brilliant function, User could match photo in certain waypoint by their own which show on Google earth.

C. Feature

- Store up to 130,000 waypoints
- LCD display and Touch pad
- Automatically change to next page
- Absolutely bike meter upgrading
- SiRF Star III Hot start 6 sec, warm start 38sec, cold start 42 sec
- Calculates precise speed and distance while you biking
- Record track-logs of vehicle movement
- User can select among Google earth, Satellite or Hybrid to show the track
- Built-in GPS application software, could save as KMZ, CSV, GPX and NMEA
- Integrated Photo with Mainnav Software
- Transmission data via USB and Bluetooth
- Weather Proof IPX6
- Bluetooth—pair PDA or smart phone for navigation.
- Replay the recorded routes/ time/ speed... point by point
- Lightweight and compact --suitable for biking, hiking and traveling.

D. Specification

Physical Dimension

Size: 73(L)X49(W)x21 (H) (mm)

LCM: 33(mm)X 33(mm)

Weight: 70g

MAINNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

Environmental Characteristics

1. Working temperature: -20°C to +75°C (internal temperature).
2. storage temperature: -55°C to +90°C.
3. input voltage: 5.5 ± 0.5VDC
4. Backup power: 3.7V Rechargeable Li-ion Battery 700mAh,

GPS

- 1) Acquisition: 20 channel parallel
- 2) Tracking: up to 12 satellites
- 3) Update rate: 1 second
- 4) Acquisition time
 - Reacquisition 0.1 sec, averaged
 - Snap start 3 sec, averaged
 - Hot start 6 sec, averaged
 - Warm start 38 sec, averaged
 - Cold start 42 sec, averaged

Bluetooth

- 1) Transmits up to 10 meters.
- 2) Version V2.0

Position accuracy:

1. Non DGPS (Differential GPS)
 - Position: <10 M at 2D RMS
 - Velocity: 0.1 meters/second, with SA off
 - Time: 1 microsecond synchronized GPS time
2. DGPS (Differential GPS) or WAAS / EGNOS ON (Built by demand)
 - Position: 1 ~ 5 meter, typical
 - Velocity: 0.05 meters/second, typical
3. Dynamic Conditions:
 - Altitude: 18,000 meters (60,000 feet) max
 - Velocity: 515 meters / second (1000 knots) max
 - Jerk: 20 meters/second, max
 - Acceleration: 4 G, max

MAINNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

Interfaces

- 1) USB 2.0 Bluetooth 2.0
- 2) NMEA 0183 Version 2.2 ASCII output (GPGGA, GPGLL, GPGSA, GPGSV, GPRMC, GPVTG).
- 3) Real-time Differential Correction input (RTCM SC-104 message types 1, 5 and 9).
(Optional model)
SiRF protocol. (optional)

Connector

Battery recharging connector: Mini USB

Battery

Capacity: 700mAh.

Type: Li-ion rechargeable

Normal use: 17.5 hours

Accessory

1. Rechargeable battery, 700mAh
2. Car charger: Mini USB , IP:10~30V, OP:5V 500mA
3. CD
4. bike mounting
5. USB cable
6. warranty card
7. Travel charger

Certification:

RoHs

CE&FCC

Warranty

All of our GPS products have the one-year warranty and repair policy from the day of purchase.

The MG-950d is warranted to be free from defects in material and function for one year from the date of purchase. Any fault product within this period under normal conditions will be replaced without any charge.

E. Operational characteristics

Initialization

Once the initial self-test is complete, MG-950d start the process of satellite acquisition and tracking automatically. MG-950D takes about 45 seconds to achieve a position fix in normal

MAINNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

circumstances. After a position fix has been calculated, valid position, velocity and time is transmitted over the output channel.

Also, our MG-950d records NMEA position data from a GPS. It is really convenient, economical alternative to using a laptop computer, especially on long road. Simply connect the logger to a GPS during your trip then download the track data to a PC.

Data logger

1. LCD screen which shows speed altitude/latitude
2. Reads NMEA data from GPS
3. Compact size and lightweight
4. Store up to 130,000 waypoints
5. User friendly Windows based Mainnav software
6. Whether proof IPX6
7. With user friendly Windows based Google earth software
8. Replay the recorded routes/ time/ speed... point by point

Navigation

With the acquisition process is completed, the MG-950d sends valid navigation information over output channels. The data include:

- 1) Velocity
- 2) Error estimates
- 3) Date/time
- 4) Latitude/longitude/altitude
- 5) Satellite and receiver status

F. Safety Statement

R&TTE / CE

This device complies with ETSI EN 300 328-1, ETSI EN 301 489-1 / 17, EN60950.

FCC

This device complies with Part 15C, Part 15B and ID Application of the FCC rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

BQB

MAINNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

G. Earth Datums & output setting

NMEA Transmitted Messages Output Messages NMEA Sentence

GPGLL: Global positioning system fixed data

GPGLL: Geographic position latitude \ longitude

GPGLL: GNSS DOP and active satellites

GPGLL: GNSS satellites in view.

GPGLL: Recommended minimum specific GNSS data

GPGLL: Course over ground and ground speed

Global Positioning System Fix Data

\$GPGLL,161229.487,3723.2475,N,12158.3416,W,1,07,1.0,9.0,M,, ,0000*18

Name	Example	Units	Description
Message ID	\$GPGLL		GGA protocol header
UTC Time	161229.487		Hhmmss.sss
Latitude	3723.2475		ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	12158.3416		dddmm.mmmm
E/W Indicator	W		E=east or W=west
Position Fix Indicator	1		See Table 5-3
Satellites Used	07		Range 0 to 12
HDOP	1.0		Horizontal Dilution of Precision
MSL Altitude	9.0	Meters	
Units	M	Meters	
Geoid Separation		Meters	
Units	M	Meters	
Age of Diff. Corr.		second	Null fields when DGPS is not used
Diff. Ref. Station ID	0000		
Checksum	*18		

MAINNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

<CR> <LF>		End of message termination
-----------	--	----------------------------

Position Fix Indicator

Value	Description
0	Fix not available or invalid
1	GPS SPS Mode, fix valid
2	Differential GPS, SPS mode, Fix valid
3	GPS PPS Mode, Fix valid

GNSS Satellites in View

(GSV)\$GPGSV,2,1,07,07,79,048,42,02,51,062,43,26,36,256,42,27,27,138,42*71

\$GPGSV,2,2,07,09,23,313,42,04,19,159,41,15,12,041,42*41

Name	Example	Units	Description
Message ID	\$GPGSV		GSV protocol header
Number of Messages	2		Range 1 to 3
Message Number	1		Range 1 to 3
Satellites in View	07		Range 1 to 12
Satellite ID	07		Channel 1 (Range 1 to 32)
Elevation	79	degrees	Channel 1 (Maximum 90)
Azimuth	048	degrees	Channel 1 (True, Range 0 to 359)
SNR (C/No)	42	dBHz	Range 0 to 99, null when not tracking
Satellite ID	27		Channel 4 (Range 1 to 32)
Elevation	27	degrees	Channel 4 (Maximum 90)
Azimuth	138	degrees	Channel 4 (True, Range 0 to 359)
SNR (C/No)	42	dBHz	Range 0 to 99, null when not tracking
Checksum	*71		
<CR> <LF>			End of message termination

Recommended Minimum Specific GNSS Data (RMC)

\$GPRMC, 161229.487,A,3723.2475,N,12158.3416,W,0.13,309.62,120598, ,*10

Name	Example	Unit	Description
Message ID	\$GPRMC		RMC protocol header
UTC Time	161229.487		hhmmss.sss
Status	A		A=data valid or V=data not valid
Latitude	3723.2475		ddmm.mmmm

MAINNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616

Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

N/S Indicator	N		N=north or S=south
Longitude	12158.3416		dddmm.mmmm
E/W Indicator	W		E=east or W=west
Speed Over Ground	0.13	Knots	
Course Over Ground	309.62	Degrees	True
Date	120598		ddmmyy
Magnetic Variation (1)		Degrees	E=east or W=west
Checksum	*10		
<CR> <LF>			End of message termination


MAINNAV International Corp.

11F, 293-1, Sec. 1, Zhongshan Rd., Banqiao City, Taipei 220, Taiwan, R.O.C. Tel: +886 2 8953-6616


Web: www.mainnav.com E-mail: info@mainnav.com Fax: +886 2 8951-8531

Bike mounting attachment


Step 1 screw the mounting together



Step 2 combine rubber with mounting and fix on bottom, then put string into the hole.

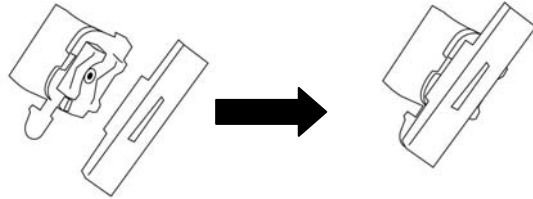

Step 3 Use string to pierce through the hole, fix the rubber and mounting

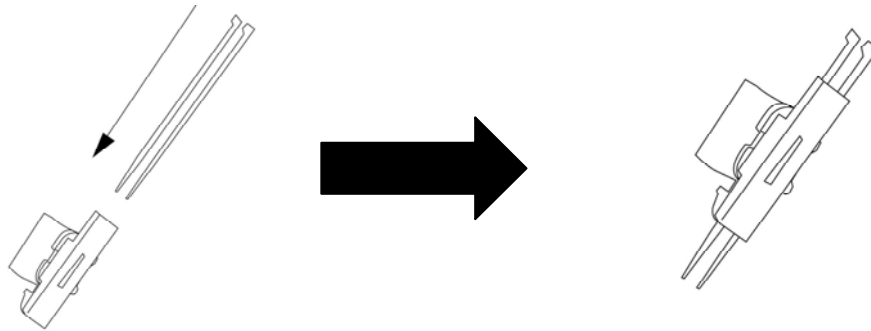

Step 4 put the mounting on handle bar and use string fix tightly, slide the Unit from two side of runner. Finished attachment.

